



“Get the power everywhere with you”

Product Catalog

DAS B - 33



| GENERATING RATES | | PRIME | STANDBY |
|-----------------------|--------|---------|---------|
| Power | KVA | 30 | 33 |
| Power | KW | 24 | 26 |
| Current | A | 43 | 47 |
| Standard Voltage | V | 400/230 | |
| Revolution Per Minute | r.p.m. | 1500 | |
| Rated at power factor | Q | 0,8 | |

STANDBY POWER;

Supplying of emergency electrical power at variable load, in the event of normal utility power failure. This rating is maximum power, no overload capability is available.

PRIME POWER;

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility power failure. 10% over load capability is available.



STANDARD FEATURES

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel engine
- Protection system on manual run
- Flexible oil pipes and oil draining valve
- Pre-heater
- Lubrication oil and anti-freeze
- 4 Poles, synchronous, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis.
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

OPTIONAL EQUIPMENTS

- Sound proof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer
- External fuel tank
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manual)
- Analog indicators
- 1 Phase - 3 Phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring

ENGINESPECIFICATIONS

| | | BAUDOIN |
|-------------------------------|------------|--------------|
| Brand | | 6M16G330/5e2 |
| Model | | 320/430 |
| Engine Power Stand BY | (kWm / hp) | 1500 |
| Revolution Per Minute | (r.p.m.) | 9.73 |
| Total Displacement | (L) | 8 SINGLE |
| Cylinders Orientation | | 126 x 130 |
| Bore x Stroke | (mm x mm) | 17,:01 |
| Compression Orientation | | ELECTRONIC |
| Governor Type | | TURBO CHARGE |
| Aspiration System | | DIRECT |
| Injection | | WATER COOLED |
| Cooling | | 24 |
| Electrical System | (VDC) | 30 |
| Lub-Oil Capacity | (L) | 90 |
| Engine Coolant Capacity | (L) | 500 |
| Fuel Tank Capacity | (L) | |
| Maximum Exhaust Temperature | (°C) | |
| Maximum Exhaust Gas Flow | (m3/h) | |
| Maximum Allowed Back Pressure | (kPa) | |
| Cooling Air Flow | (m3/min) | |
| Fuel Consumption 50 % | (L/h) | 35,3 |
| Fuel Consumption 75 % | (L/h) | 52,3 |
| Fuel Consumption 100 % | (L/h) | 70,5 |

- Replaceable cylinder jacket • Dry type replaceable oil filter • Heat-resistant radiator for 50 °C

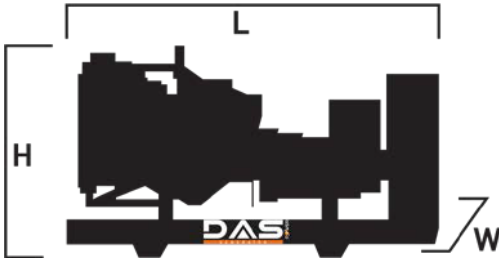
ALTERNATORSPECIFICATIONS

| | | |
|--------------------------------|------|------------------|
| Output Voltage | (V) | 400/230 |
| Frequency | (Hz) | 50 |
| Stationary Voltage Regulation | (±) | 1 % |
| Short Circuit Current | | > 300 % |
| Insulation | | H |
| Protection | | IP 23 |
| Efficiency | (%) | 94,2 |
| Overloading | | 110 % FOR 1 HOUR |
| Power Factor | (Qi) | 0.8 |
| Total Harmonic Distortion Rate | | THF < 2 % |
| Connection Type | | STAR |
| Number Of Pole | | 4 |
| Number Of Bearing | | SINGLE |

- 4Poles,Self-ExcitationandSelf-Cooled,Brushless,Synchrontypealternator•Electronictypeautomaticvoltage regulator(AVR)

DIMENSIONS WITHOUT CANOPY

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Download able language
- Wave form display of V & I
- Harmonic analysis of V & I
- Synchroscope & checksynch
- Allows closed transfers
- 16Amp MCB & GCB outputs
- 8 configurable digital outputs
- Outputs expandable to 40
- 4 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple nominal conditions
- Multiple automatic exerciser
- Weekly operations schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel fulling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel fulling counter
- Fuel consumption counter
- Modem & Ethernet diagnostics
- Configurable through USB, RS-485, Ethernet and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring Ethernet and GPRS
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (USB & RS232)
- Dynamic DNS support
- Easy USB firmware upgrade
- IP65 rating with standard gasket

DIMENSIONS AND WEIGHT


| | | |
|--------------------|----|------|
| Length (L) | mm | 3500 |
| Height (H) | mm | 1850 |
| Width (W) | mm | 1200 |
| Wet weight | kg | 2300 |
| Fuel Tank Capacity | L | 500 |

DIMENSIONS AND WEIGHT


| | | |
|--------------------|----|------|
| Length (L) | mm | 3500 |
| Height (H) | mm | 2000 |
| Width (W) | mm | 1200 |
| Wet weight | kg | 2778 |
| Fuel Tank Capacity | L | 500 |



“Get the power everywhere with you”

Adres: Malıköy Başkent OSB, the 17 avenue No:8 Sincan/ANKARA

T: 0850 241 06 83

www.daspower.com.tr

info@daspower.com.tr

Contact Us

